



GV-Edge Recording Manager

Installation and User Guide
for **Mac Platforms**

Table of Contents



■	GV-Edge Installation	2
	Downloading and Installation	
■	Configuration	3-5
	Adding Your Cameras	
■	Live View	6-8
■	Video Playback	9
	Navigating Video Playback	

GV-Edge Installation



Download and Install


- 1 - Open the app store.
- 2 - Click on the search bar and enter "Edge Recording Manager".
- 3 - Click "Get", then "Install App".
- 4 - Click "Open".

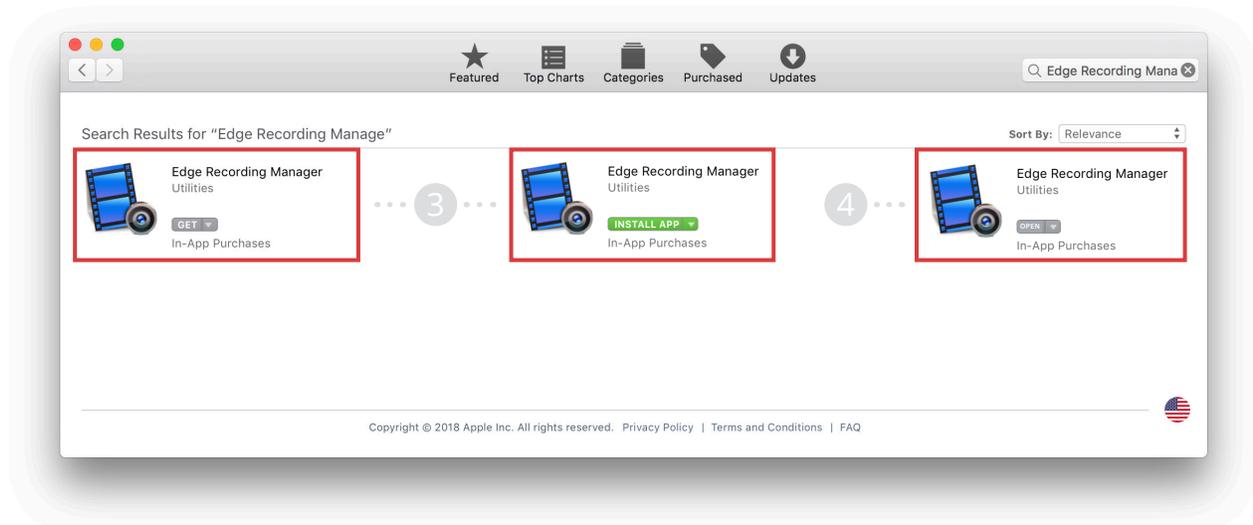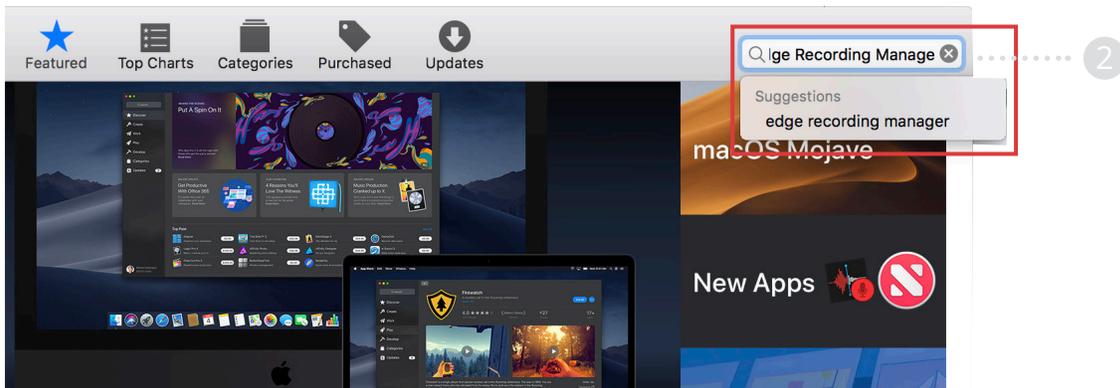


Configuration

Adding Your Cameras

- 1 - Click on the setup button on the top right corner of the screen.
 - 2 - Click on the "Add Camera" button.
 - 3 - Click on the "Manual" button.
 - 4 - Click on the "Name" field and enter a name for the DVR.
 - 5 - Click on the "IP" field and enter the IP of the DVR you would like to add cameras from.
 - 6 - Click on the "Command Port" field and enter 8873.
 - 7 - Click on the "HTTP Port" field and enter 8868.
 - 8 - Click on the "Username" field and enter your DVR Username.
 - 9 - Click on the "Password" field and enter your DVR password.
- Note:** If you do not have a username or password on the DVR, please contact DTT support at 800-933-8388.

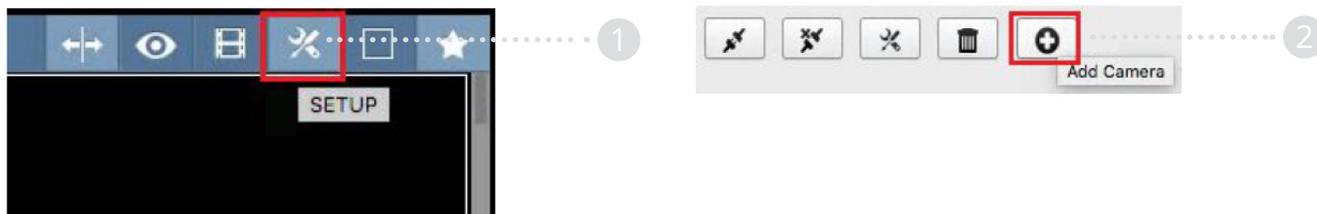


- 10 - Click on the "Refresh" button in the advanced section to view all cameras available on the DVR.
- 11 - Click the check box next to any cameras that need to be added.

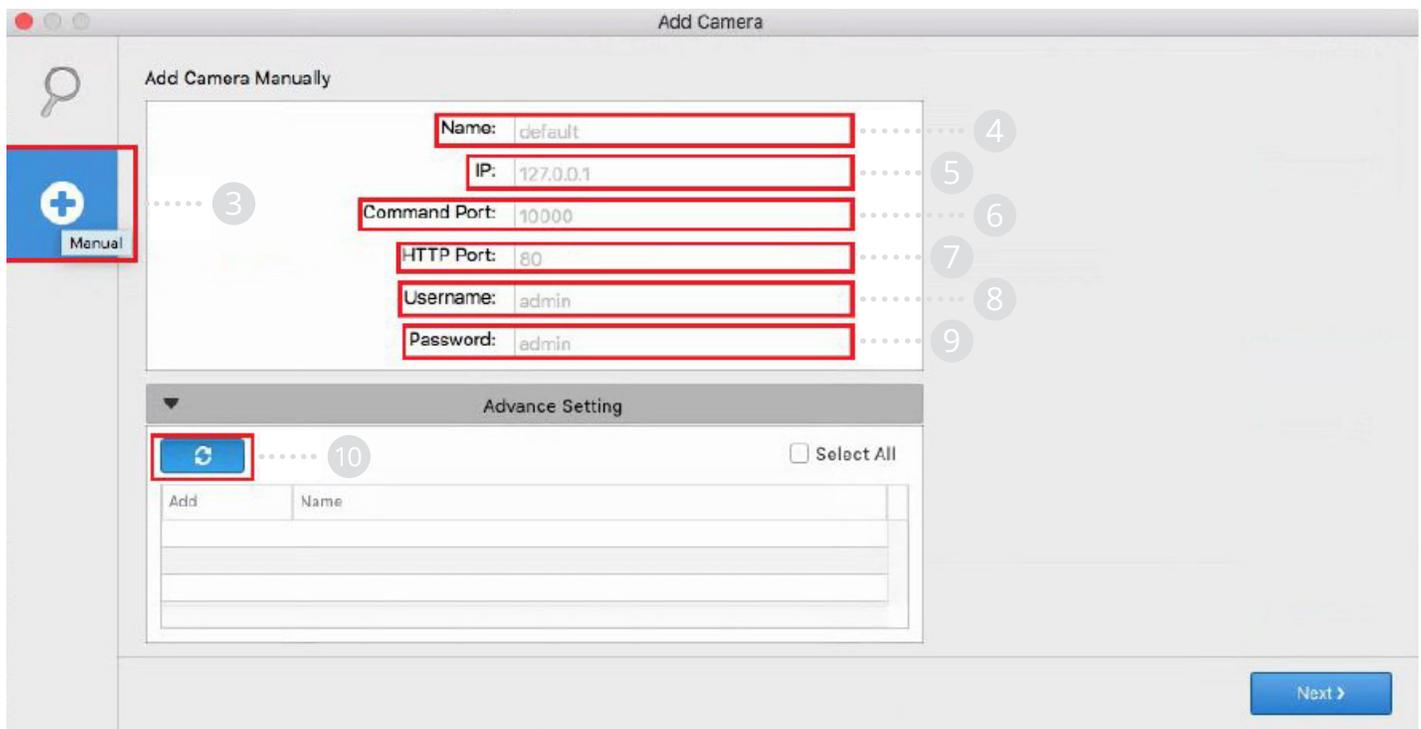

12 - Once you have selected all of the cameras to be added, you can rename them by double-clicking on the camera name.



13 - Click "Apply" to finish adding all of the cameras.

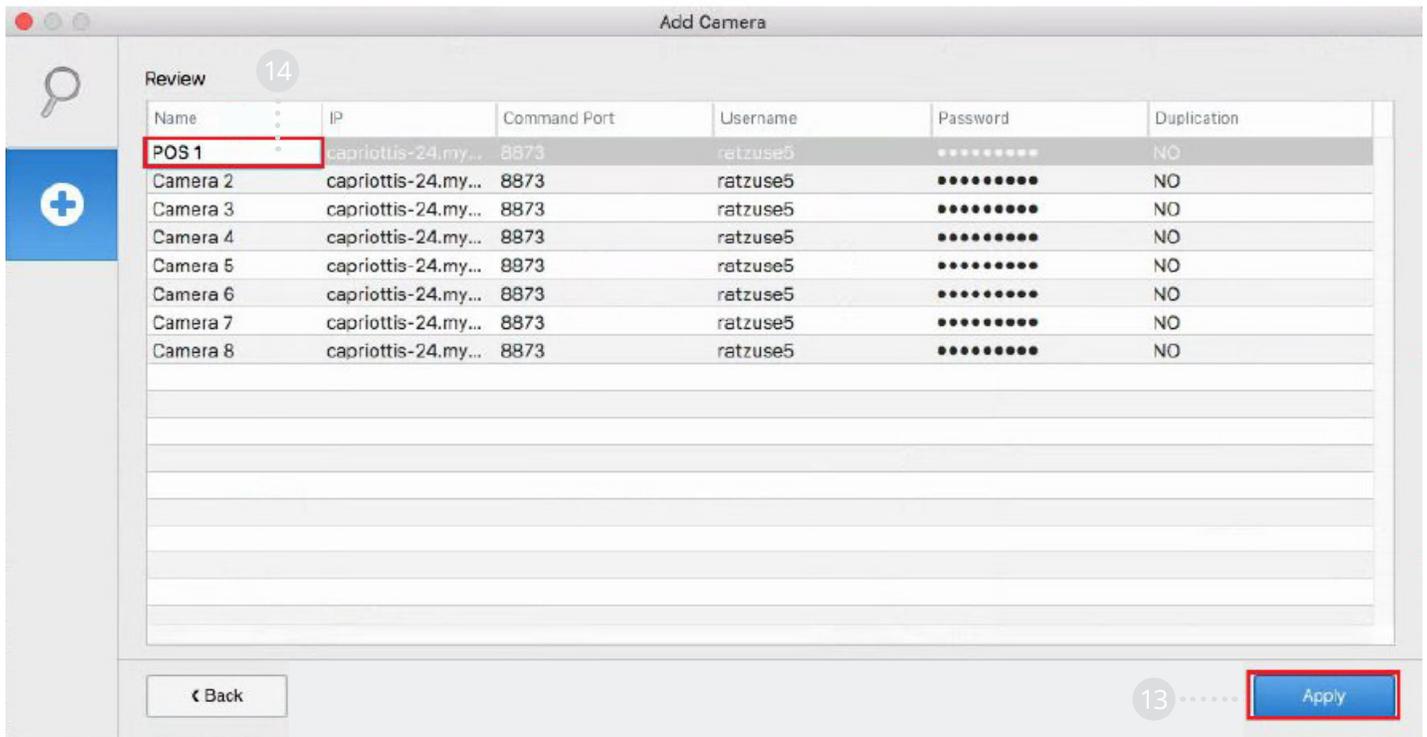


Live View

Navigating Live View

- 1 - To begin viewing cameras, click on tools, then utilities.
- 2 - Once the cameras are connected, click on the “Layout” button to change the camera grid.
- 3 - Right click on any camera to reveal the additional settings option.
- 4 - Click on “Snapshot” to get a screenshot of the camera image.
- 5 - Click on “Audio” to listen to any audio device attached to the camera.
- 6 - Click on “PIP” to enable PIP view.
- 7 - Click on “PAP” to enable PAP view.
- 8 - Click “Monitoring” to enable or disable monitoring on the DVR.
Warning: If disabled, the camera will no longer be recording on the DVR.
- 9 - Click on “Time Synchronize” to sync the camera time to DVR time.
- 10 - Click “Video Stream” to change video options.

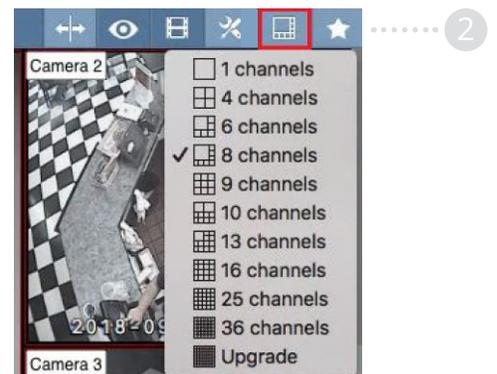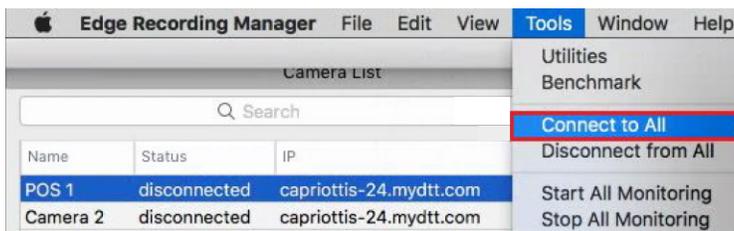


- 11 - Click "Enable Video Decode Acceleration" to enable hardware acceleration. (This may increase or decrease performance depending on the Mac hardware").
- 12 - Click on "Disconnect" to disconnect from the camera selected.

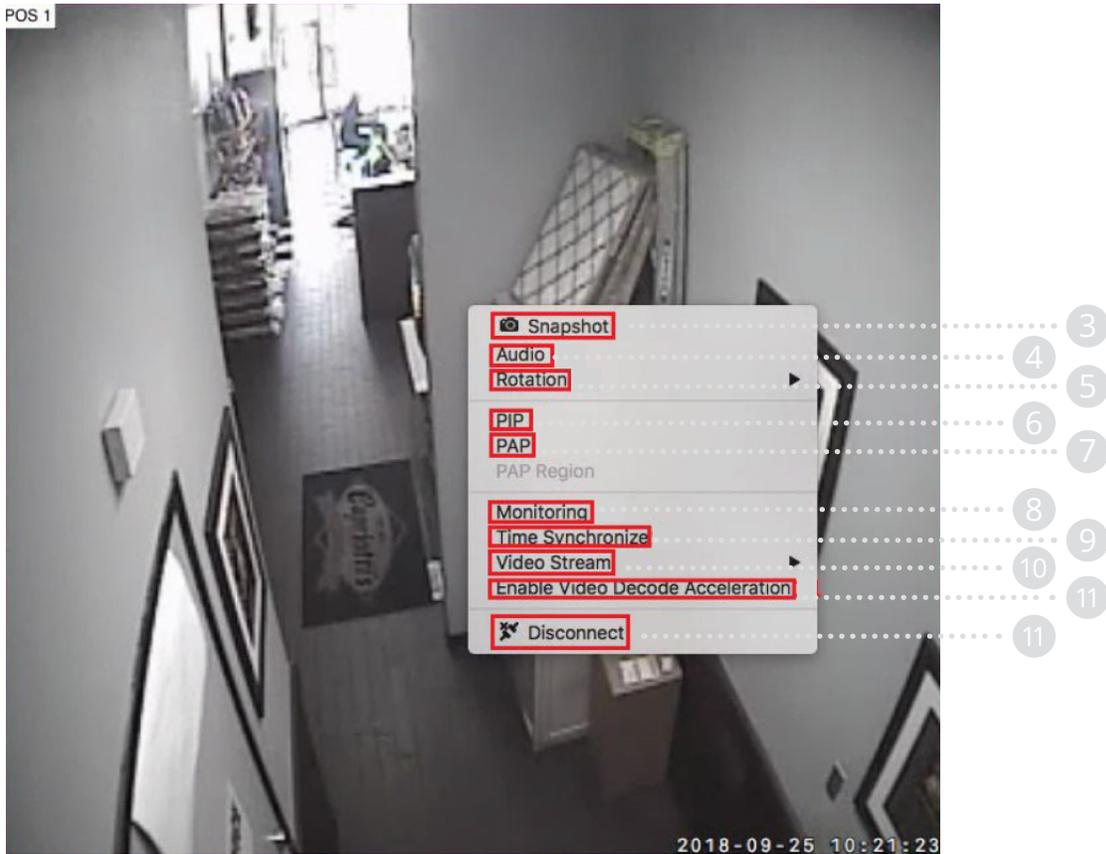

Camera Groups

- 1 - To create a camera group, click on the “Star” on the top right corner of the screen.
- 2 - Click on “Add My Favorite”.
- 3 - Click on the “Name” field and enter any name you wish the group to have.
- 4 - Click “Done”.
- 5 - Once a custom group has been added, you may view it at any time by clicking the “Star” button and selecting the location.

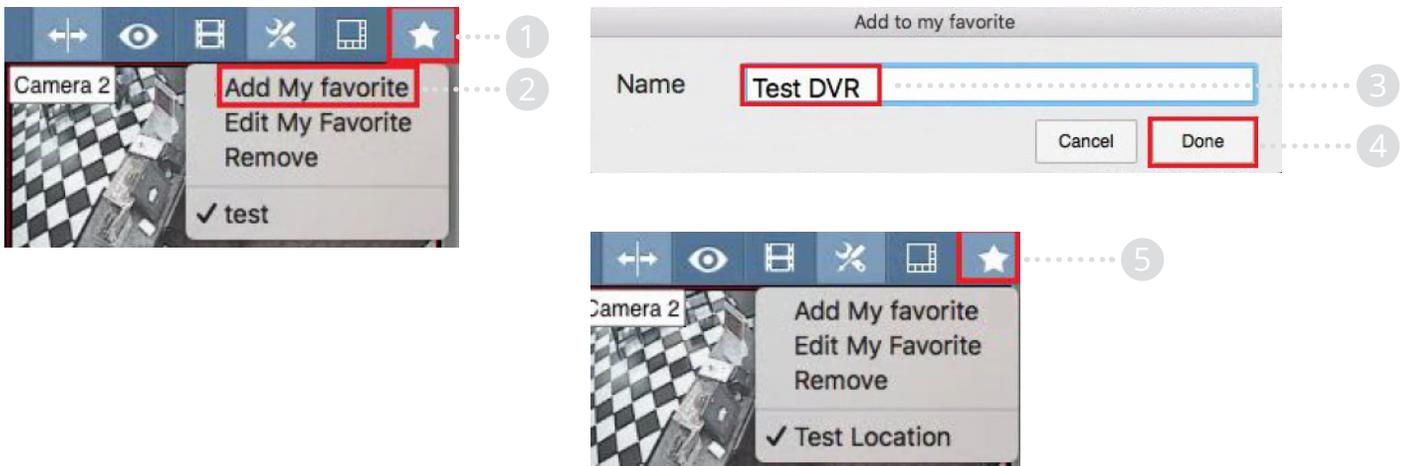

Video Playback

Navigating Video Playback

- 1 - To open the playback menu, click on the "Playback" button.
- 2 - Select a camera.
- 3 - Select a date.
- 4 - Select a time.

